



INSTRUCTION MANUAL

2.1CH SPEAKER WITH USB/SD FUNCTION

TSP-4240USD







DEAR CUSTOMER

In order to achieve the best performance of your product, please read this instruction manual carefully before using, and keep it for future reference.



If you need extra support, please write to info@premiermundo.com

	CAUTION	
RISK OF ELECTRIC SHOCK, DO NOT OPEN		
<p>Caution: To reduce the risk of electric shock do not open this device, there are not serviceable parts for customers. Please refer any maintenance or repair to qualified personnel.</p>		
	<p>This sign means the existence of dangerous voltage at the inside of the unit, which states a risk of electric shock.</p>	
	<p>This sign means that there are important instructions of operation and handling in the manual that comes with this device.</p>	


PREMIER CUSTOMER SERVICE

Venezuela:	0800 – ELECTRIC (353-2874)
Colombia:	01-900-331-PEJC (7352)
Panama:	300-5185
Website	www.premiermundo.com
E-mail:	servicioalcliente@premiermundo.com

NOTE

This unit may be submitted to changes in specifications, characteristics and/or operation without prior notice to the user, in order to continue improving and developing its technology.

Packing List:

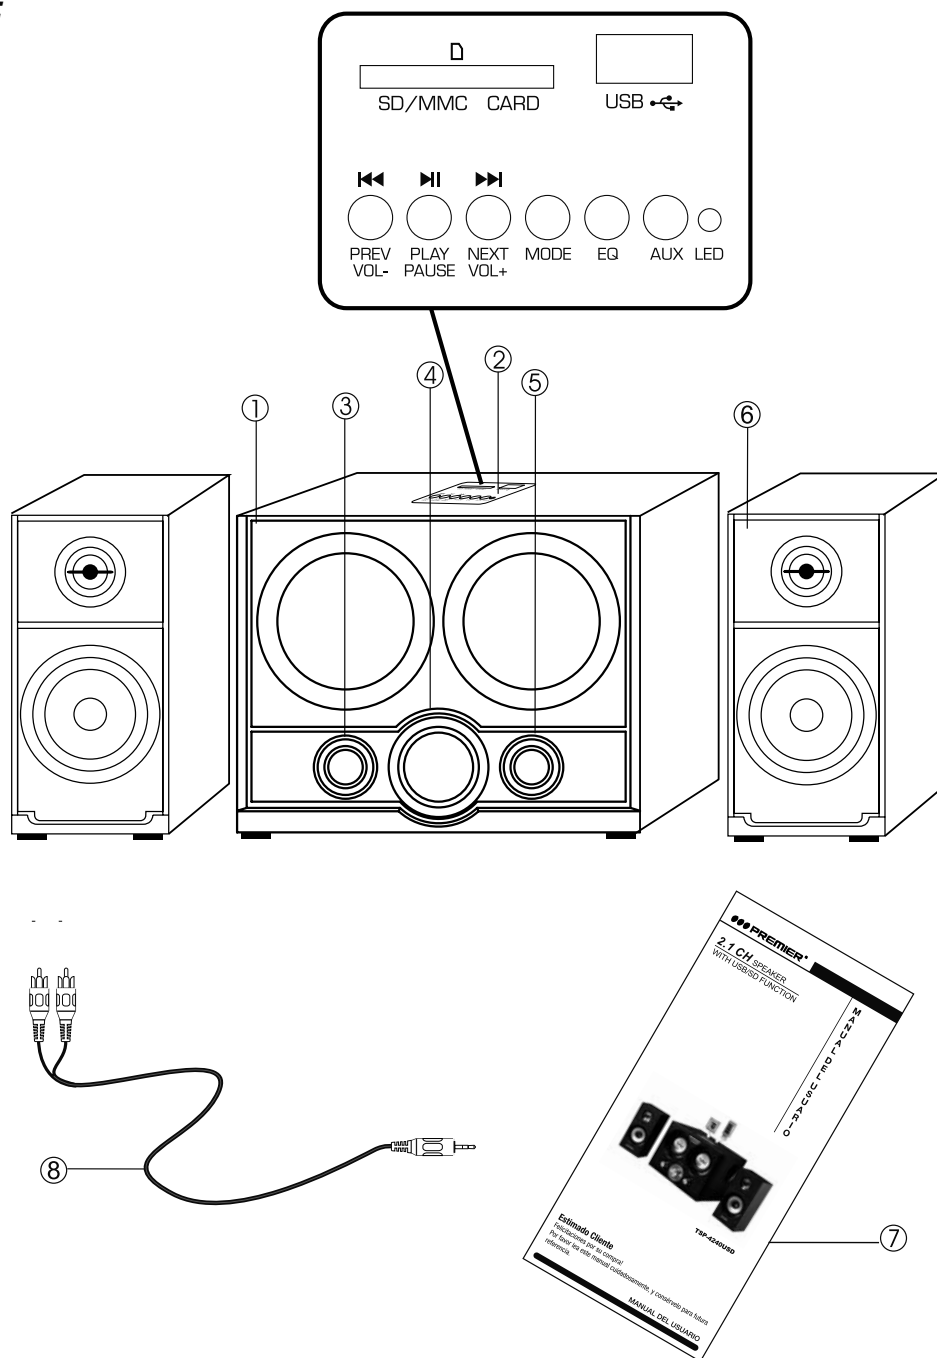

- 1. SUBWOOFER 2. USB/SD 3. BASS CONTROL 4. VOLUME CONTROL 5. TREBLE CONTROL
6. SATELLITE SPEAKERS 7. USER'S MANUAL 8. AUDIO CABLE (PLUG)**

Features:

1. With built-in amplifier.
2. Enhanced dynamic bass boost.
3. Perfect Shape Design of satellite speakers which creates clear treble effect.
4. Ideal for PC and other equipments such as DVD, CD Player, MP3, TV, Etc.

Basic Operation:

1. Turn the volume and bass control to minimum level before turning the power ON.
2. Play a music and turn the volume and bass control to the desired level.

Specification:

- 2.1CH SPEAKER BOX
- USB/SD SLOT AND FUNCTION
- POWER-SATELLITE: RMS 10WX 2
- SUBWOOFER: RMS 25W
- FREQUENCY RESPONSE: 50HZ-20KHZ
- POWER SUPPLY: AC110V/60HZ
- S/N RATIO: ≥ 70 dB

CONNECTIONS

CONNECTION COLOR CODING
RED = LEFT CHANNEL
WHITE = RIGHT CHANNEL



Important:

Do not plug in the AC power cord until the speakers and other equipments are connected




Note:

Carefully insert the plugs into the jacks.

Loose connection may produce a humming sound or other noise interference.

Diagram

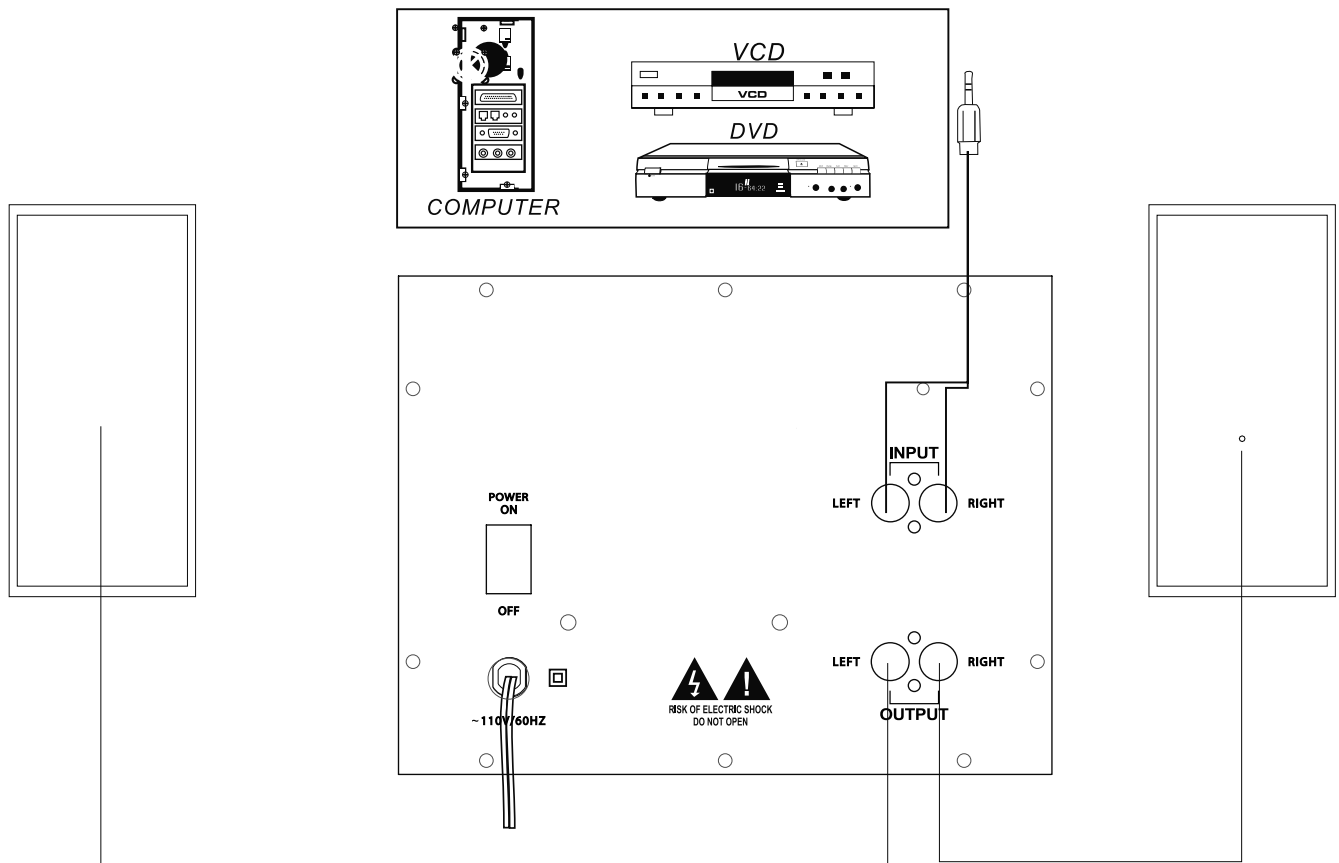

Packing List:

Subwoofer Speaker	1 Pc
Satellite Speaker	1 Pair
Audio Cable	1 Pc
User Manual	1 Pc

Installation: (as diagram)

1. Connect one end of the red-black speaker cable to the cable clips on the back of the satellite speaker, and the other end to the L/R audio output plug on the back panel of the subwoofer. Carefully check the polarity. It must be Red to Red and White to White.
2. Connect the 3.5mm stereo audio plug to the audio port of PC or other audio equipment. Then, connect the other end of the audio plug to the input jack on the back of the subwoofer.
3. Make sure all the cable are connected correctly, then connect the power cord to AC power.

